Cable Assemblies

Cable lengths are indicated by colored labels, as shown below.

5 ft


18 ft

25 ft

50 ft

100 ft (CA6 only)

Connect the Network Control Panel, Primary Hubs and Programmable Keypads using 6-conductor Cable Assemblies, available in 5, 18, 25, 50 and 100-foot lengths (1.5, 5.5, 7.6, 15.2 and 30.4 meters). Connect Secondary Hubs to Primary Hubs using 2-conductor Cable Assemblies, available in 5, 18, 25 and 50-foot lengths (1.5, 5.5, 7.6 and 15.2 meters). To create longer lengths, connect two assemblies with a Cable Coupler.

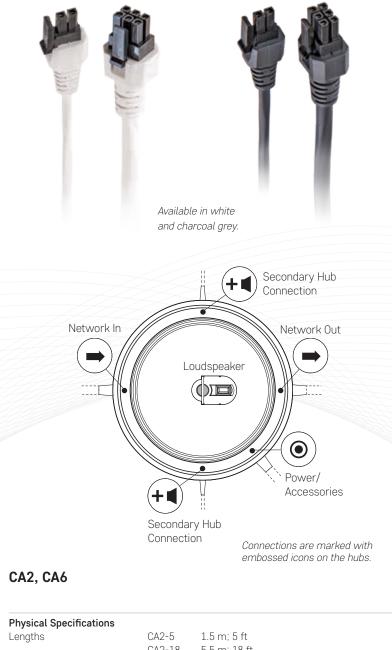

CA2-5 CA2-18 CA2-25 CA2-50	5.5 m; 18 ft 7.6 m; 25 ft
CA6-18 CA6-25 CA6-50	1.5 m; 5 ft 5.5 m; 18 ft 7.6 m; 25 ft 15.2 m; 50 ft 30.4 m; 100 ft
2- and 6-pin over-molded micro-connectors featuring orientation guides and positive-lock mechanism 20 AWG Copper stranded White or charcoal grey	
5 years; see LogiSon® Product Warranty for details	
Meets UL, CE and FCC standards and is approved for use in air-handling plenums; RoHS compliant	
	CA2-18 CA2-25 CA2-50 CA6-5 CA6-18 CA6-25 CA6-25 CA6-25 CA6-100 2- and 6-p orientation 20 AWG Copper str White or c 5 years; se Meets UL,

Technical specifications are subject to change without notice.

SPECIFICATIONS