


Cable Assemblies


Connect the Network Control Panel, Primary Hubs and Programmable Keypads using 6-conductor Cable Assemblies, available in 5, 18, 25, 50 and 100-foot lengths (1.5, 5.5, 7.6, 15.2 and 30.4 meters). Connect Secondary Hubs to Primary Hubs using 2-conductor Cable Assemblies, available in 5, 18, 25 and 50-foot lengths (1.5, 5.5, 7.6 and 15.2 meters). To create longer lengths, connect two assemblies with a Cable Coupler.

Cable lengths are indicated by colored labels, as shown below.

- 5 ft
- 18 ft
- 25 ft
- 50 ft
- 100 ft (CA6 only)

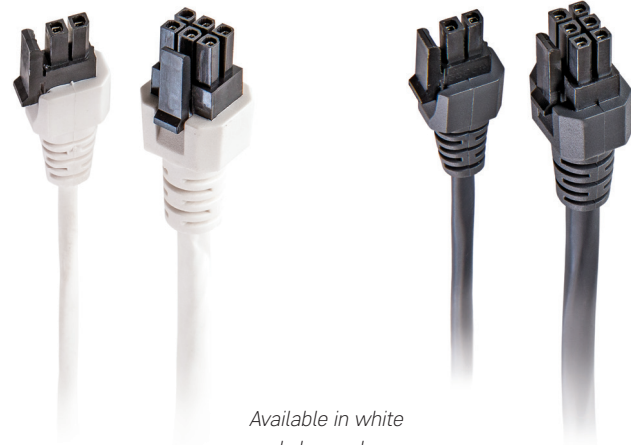

Available in white and charcoal grey.

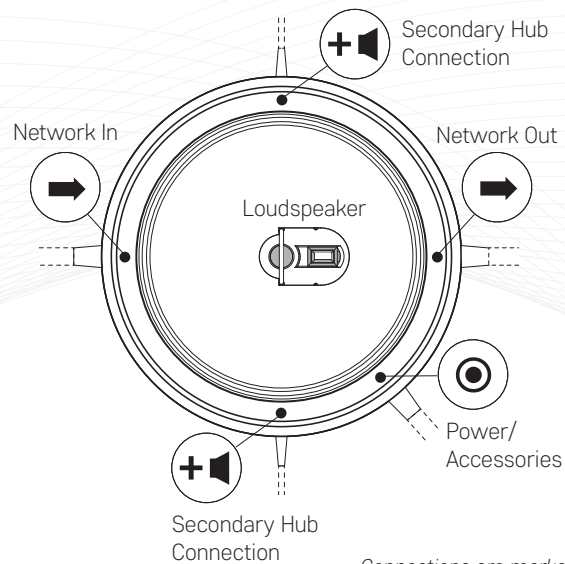

Connections are marked with embossed icons on the hubs.

CA2, CA6

Physical Specifications

Lengths	CA2-5	1.5 m; 5 ft
	CA2-18	5.5 m; 18 ft
	CA2-25	7.6 m; 25 ft
	CA2-50	15.2 m; 50 ft
	CA6-5	1.5 m; 5 ft
	CA6-18	5.5 m; 18 ft
	CA6-25	7.6 m; 25 ft
	CA6-50	15.2 m; 50 ft
	CA6-100	30.4 m; 100 ft
	Connectors	2- and 6-pin over-molded micro-connectors featuring orientation guides and positive-lock mechanism
Gauge	CA2	2 x 20 AWG
	CA6	2 x 18 AWG, 4 x 24 AWG (White)
		6 x 20 AWG (Charcoal Grey)
Material	Copper stranded	
Color	White or charcoal grey	

Warranty 5 years; see LogiSon® Product Warranty for details

Certifications Meets UL, CE and FCC standards and is approved for use in air-handling plenums; RoHS compliant

Technical specifications are subject to change without notice.

SPECIFICATIONS

