


# CABLE ASSEMBLIES + COUPLERS

CA2, CA6, CC2, CC6



CC2

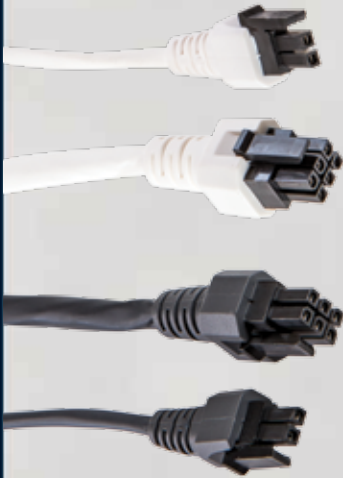

CC6

Cable Couplers are used to connect two Cable Assemblies together when a longer length is required. They are available in both 2- (CC2) and 6-conductor (CC6) sizes.

All Cable Assemblies and Cable Couplers feature micro-connectors that simply snap together, enabling quick, accurate and tidy installation.




The Cable Assemblies and Cable Couplers are also available in charcoal grey.

**i** The LogiSon Acoustic Network is installed without hard-wiring timer, keypad, paging and music zones, because all zones are software-generated. Minimal cabling ensures efficient installation and a clean appearance in visible applications.

A single line of plenum-rated, low-voltage cable connects the components, carrying power, control and audio signals across the LogiSon Acoustic Network.

The 2-conductor cables are available in 5, 18, 25 and 50 foot lengths (1.5, 5.5, 7.6 and 15.2 meters). The 6-conductor cables are available in 5, 18, 25, 50 and 100 foot lengths (1.5, 5.5, 7.6, 15.2 and 30.4 meters).

Cabling connections are marked with embossed icons on the hubs. Positive-locking mechanisms prevent accidental disconnection.

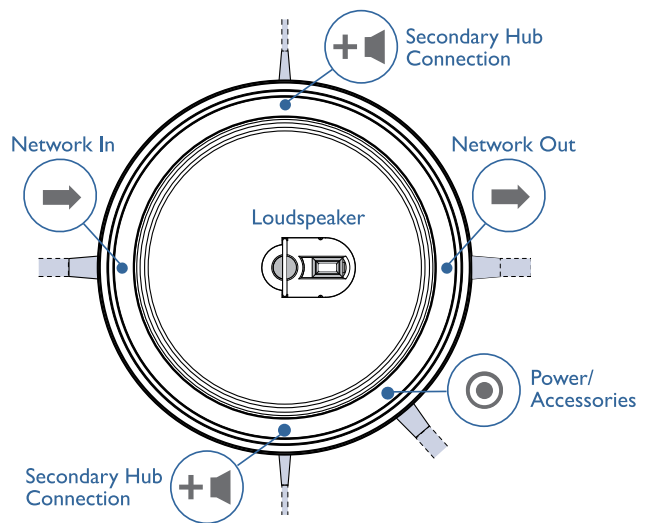

## SPECIFICATIONS

### Physical Specifications

Lengths	CA2-5	5 ft; 1.5 m	
	CA2-18	18 ft; 5.5 m	
	CA2-25	25 ft; 7.6 m	
	CA2-50	50 ft; 15.2 m	
	CA6-5	5 ft; 1.5 m	
	CA6-18	18 ft; 5.5 m	
	CA6-25	25 ft; 7.6 m	
	CA6-50	50 ft; 15.2 m	
	CA6-100	100 ft; 30.4 m	
	Connectors	2- and 6-pin over-molded micro-connectors featuring orientation guides and positive-lock mechanism	
	Gauge	20 AWG	
	Material	Copper stranded	
Color	White or charcoal grey		

**Warranty** 5 years; see LogiSon® Product Warranty for details

**Certifications** Meets UL, CE and FCC standards and is approved for use in air-handling plenums; RoHS compliant